

# CEM SMS Finder

## SMS Text Messaging Module

### OVERVIEW

The CEM SMS Finder module is a turnkey SMS server that empowers the CEM AC2000 and Webentry II Pro products with the ability to send SMS text messages in the event of an alarm.

The ready-to-use solution simply plugs into the Ethernet network and connects to the wireless network via an integrated quad-band GSM modem. This allows quick and easy communication of alarm events to designated mobile cell phones.

Designed with ease of use in mind, the CEM SMSFinder module simply requires a standard SIM card to be inserted and then the AC2000 and Webentry II Pro systems will be able to notify designated users of important or critical events within the security system.



CEM SMS Finder

### FEATURES


- Works with AC2000 SE (Standard Edition), AC2000 Lite and WebEntry II Pro systems
- Sends SMS text messages in the event of an alarm
- Plug and Play
- Web based configuration and management
- Integrated quad-band GSM modem
- Desktop or Panel mounting

**PRODUCT HIGHLIGHTS**
**Ready-to-Use SMS Server**

The SMSFinder is a turnkey SMS server solution that includes an integrated server, database and quad-band GSM modem in one small compact device. Setting it up is a simple process of connecting to the network, inserting a properly configured SIM card and configuring from a network-connected PC using a web interface.

**Instant notifications**

The benefit of the SMS Finder is that it allows designated users to receive instant notifications of critical security events to mobile phones. This allows security managers to be quicker in their action and resolution of system events.

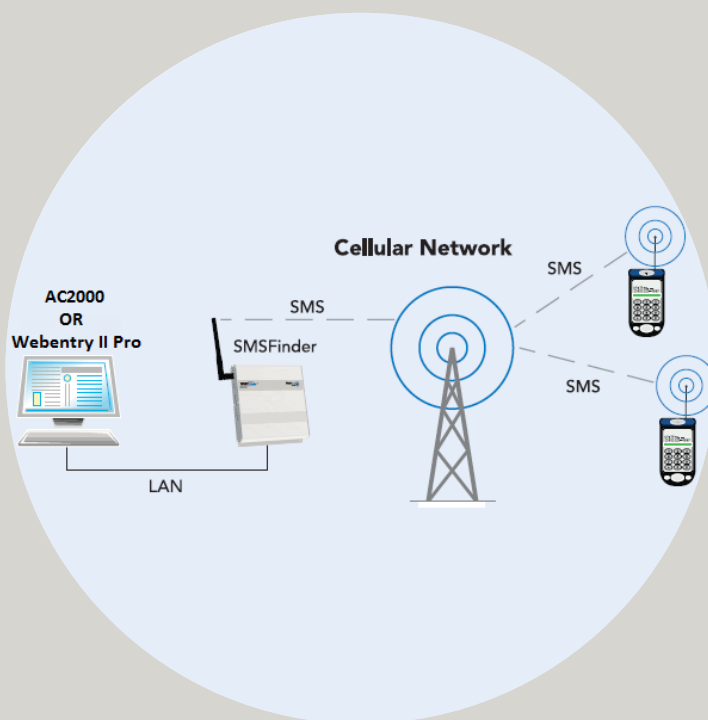

## TECHNICAL SPECIFICATIONS

**Hardware Interface**

Network: 10/100BaseT  
 Connector: RJ-45 Ethernet connection

**Modem**

Quad-band GSM 850/900/1800/1900 MHz

**SIM Connector**

Standard 3V SIM receptacle

**Antenna Connector**

RF Antenna, 50 ohm SMA (female)

**Power Supply**

9 VDC, 1.7A

**Physical Description**

6.4" w x 1.2" h x 6" d; 1.25lbs.  
 (16.3 cm x 3.0 cm x 15.2 cm; .56 kg)

**Operating Environment**

Temperature range: +32° to 120° F (0° to +50° C)  
 Humidity range: 25-85% noncondensing

**Certifications**

CE Mark, R&TTE  
 EMC: FCC 2, 15, 22, 24, EN 55022, EN 55024  
 Safety: cUL, EN 60950, UL 60950  
 Network: PTCRB

**SYSTEM REQUIREMENTS**

AC2000 SE v6.2 upwards  
 AC2000 Lite v6.4 upwards  
 upWebEntry II Pro

**ORDERING INFORMATION**

Product Code	Description
CEQ/060/100	CEM SMS Finder Module

Product specifications and availability is subject to change without notice. Certain product names mentioned herein may be trade names and/or registered trademarks of their companies.